


## measuring instructions

For accurate measurements please use a metal tape measure, and take measurements in centimetres, to the nearest 0.1cm.


- We would recommend that blinds are fixed to the ceiling using the top fix swivel brackets.
- Blinds can be fixed to the face of the window frame or wall with the UEB bracket in conjunction with the top fix swivel bracket.
- Decide whether you want your blind to hang inside or outside of the window recess. **With this blind type, we would recommend having it as large as possible to make the most of the appearance.**
- Please check for the proximity of adjacent walls, furniture, window handles etc. when measuring for your blinds.
- Consider if you want the fabric panels to sit to the side(s) of your window and allow for this when measuring. Panel widths are 30cm, 45cm, and 60cm.
- **Please refer to the style options and ordering guide pages for more information.**

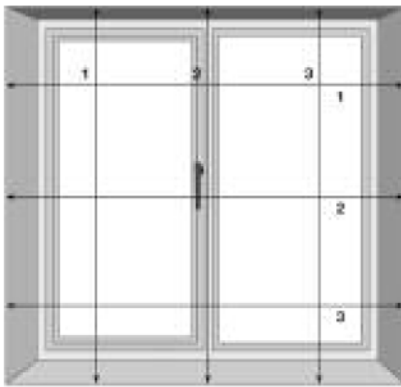

**Recess**

### For blinds to hang inside the window recess:

Measure the drop by taking the measurement from the top of the recess to the window sill or floor, in the three places as shown. Record the smallest measurement. We will make all adjustments to ensure your blinds fit perfectly.

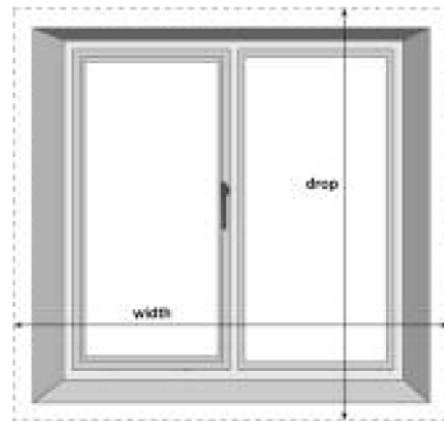

**Exact**

### For blinds to hang outside the window recess:

Measure the exact area you would like to cover, as shown.

## aftercare

Look after your blinds by following the straightforward operating instructions below.

### Operating

- The cord or wand opens and closes the blind.
- The cord weight hangs onto the cord to act as a stabiliser to keep the cord in place whilst operating.
- The fabric panel is attached with Velcro to the panel runner.

### Cleaning - It is essential to clean the panels by the appropriate method.

- It is recommended that you use the upholstery attachment of your vacuum cleaner.
- For heavier spots of dirt, use a well wrung out damp cloth with a very mild solution of detergent to gently wipe the mark.