


## measuring instructions


For accurate measurements please use a metal tape measure, and take measurements in centimetres, to the nearest 0.1cm.

- All of our blinds can be fixed into the face of the window frame or wall, or into the top of the lintel - allowing you total control of the depth your blind can be positioned in the depth of your window recess.
- Choose whether you want the blinds to hang inside or outside the window recess.
- Please check for the proximity of adjacent walls, furniture, window handles etc. when measuring for your blinds.

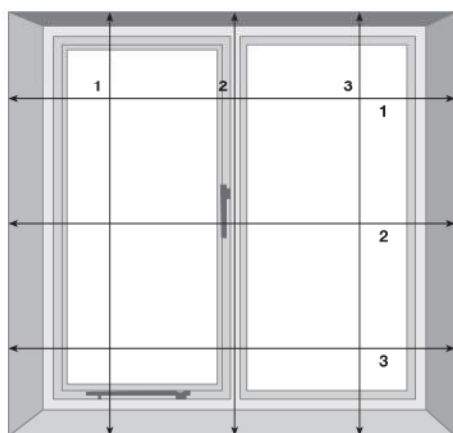

**Recess**

**For blinds to hang inside the window recess:**  
Measure the drop by taking the measurement from the top of the recess to the window sill, in three places as shown. Measure the width of the window recess from wall to wall, in three places as shown. Take the smallest measurement. We will make all adjustments to ensure your blinds fit perfectly.

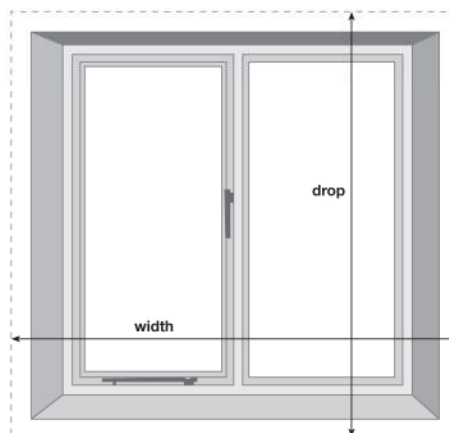

**Exact**

**For blinds to hang outside the window recess:**  
Measure the exact area you would like the blind to cover as shown.

## aftercare

Look after your blinds by following the straightforward operating instructions below.

### Operating Instructions

- The cord on the Pleated blind operates the height of the blind.
- To release the cord lock, pull the cord forward then raise or lower the blind to achieve your desired effect. Re-lock the cord by pulling it towards the window.

### Cleaning

- Pleated blinds simply need to be dusted using a dry duster. Be careful not to damage the pleats by pressing too hard.