


excel roller blinds

fitting instructions

Sidewinder Installation

1. Decide which side the sidewinder is to be on
(The photographs in these instructions are for right-hand control: reverse for left-hand control)

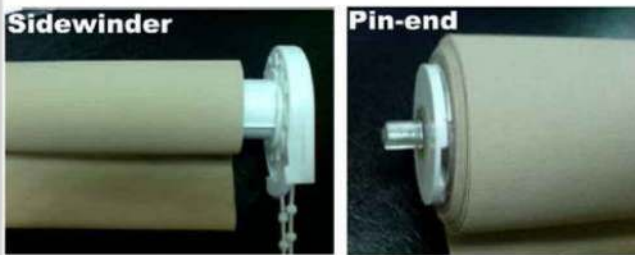

3. Insert sidewinder and pin-end into roller tube. Ensure they are fully inserted. Do not hammer into place as this may damage the components



2. Insert chain into sidewinder and pull approximately 15cm through at the back side of the sidewinder



4. To install the blind:

- Slide the sidewinder onto bracket;
- Open the pin-end bracket (as shown above);
- Set the pin into the bracket, ensuring it is correctly located;
- Close the bracket

Set Chain Length

1. Cut the chain to the desired length with a pair of scissors



2. Firmly press the cut end of the chain (as shown) into the chain coupling device and close to link the chain.

Correct Fabric Run-Off (if necessary)



1. The above picture shows the fabric running off from the *right-hand side* of the blind



2. This picture shows how to correct fabric run-off from the *left-hand side*. Simply stick a small (~3 cm long) strip of masking tape to the aluminium tube

3. Fully wind the blind up. Repeat step 2 until the fabric is no longer running-off